
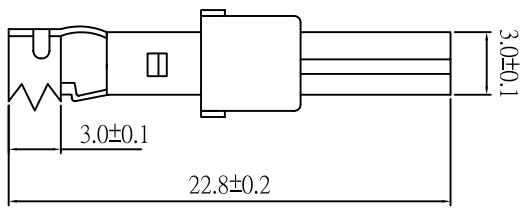
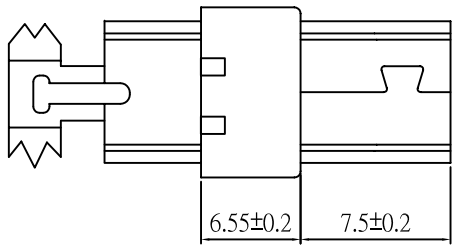

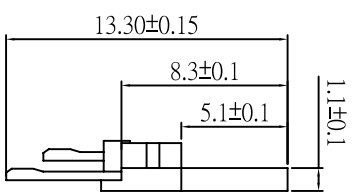


1 2 3 4 5 6 7 8 9 0

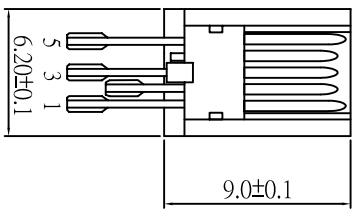

ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 1 AMPERES.
 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V R.M.S
 INSULATION RESISTANCE: 500 MEGOHMS MINIMUM AT DC 500V.
 CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM.
 OPERATING TEMPERATURE: -55°C TO +105°C.

MECHANICAL CHARACTERISTICS:

CONTACT INSERTION FORCE: 4.0 KG. MAXIMUM.
 CONTACT SEPARATION FORCE: 0.5 KG. MINIMUM.

MATERIALS:

CONTACT: BRASS.
 INSULATOR: L.C.P
 SHELL: COLD ROLLED STEEL.

FINISHES:

CONTACTS: GOLD FLASHED 10U", 15U", 20U", 30U".
 SHELL: NICKEL OR TIN PLATED.



煜倫有限公司

PART NO. MSB-PS-5B

DWG NO. MSB-PS-5B

FILE NO. HC-039

UNIT / mm

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X
 .XX
 .XXX
 AWG

DESCRIPTION:

MINI U.S.B 5PIN MALE SOLDER

AREA

REVISIONS

HK

DATE