
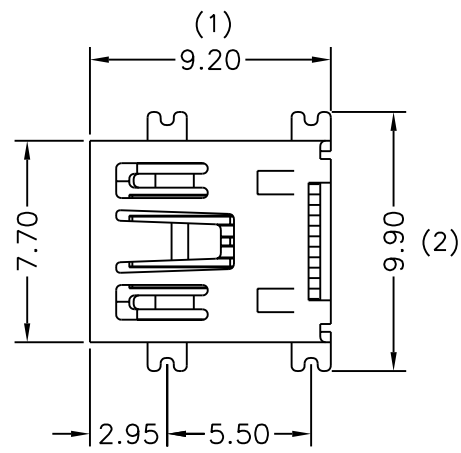


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

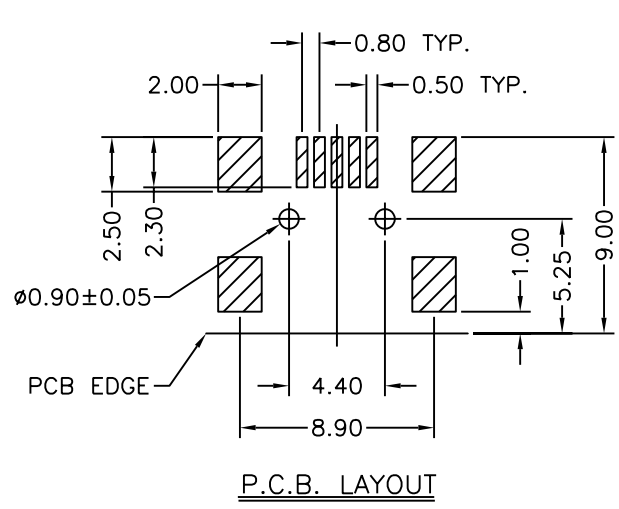

MATERIAL

1. HOUSING : NYLON UL 94V-0
2. CONTACT : PHOSPHOR BRONZE.
3. SHIELD : BRASS.

FINISH




1. CONTACT : GOLD OVER 50 μ " NICKEL.
2. SOLDER TAIL : 120 μ " MIN. TIN-LEAD OVER 50 μ " NICKEL.
3. SHIELD : NICKEL PLATED

SPECIFICATION

1. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : AC 500 R.M.S.
3. INSULATION RESISTANCE : 500 MEGOHMS MIN.
4. CONTACT CURRENT : 1 AMPERES.

ENVIRONMENTAL

1. TEMPERATURE RANGE : -55°C TO +105°C.

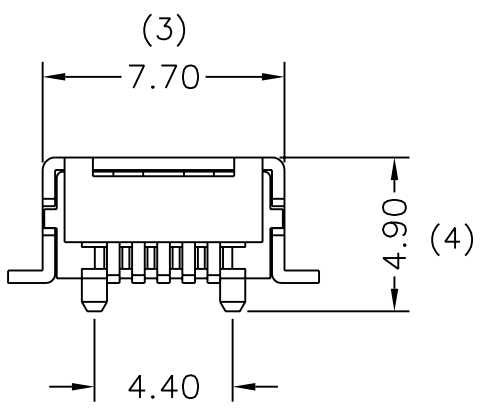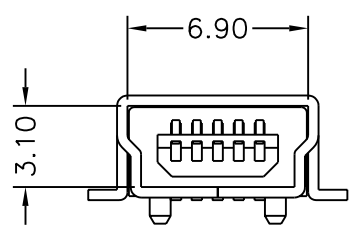

PART NO. MSB-SW-5B

DWG NO. MSB-SW-5B

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION: MINI USB 5P B TYPE SMT TYPE
MINI USB 5P 磷銅.黑膠 NO MK

煜倫有限公司

FILE NO.

DRAWING BY

X ± 0.3
XX ± 0.2
.XXX ± 0.5
AWG

UNIT / mm

SCALE 1:1

PROJECTION

AREA

REVISIONS

HK

DATE