

NOTE:

MATERIAL

- 1). TERMINAL: PHOSPHOR BRONZE  
 PLATING: 80-120u" Sn/Pb PLATING OVER  
 50u" NICKEL  
 GOLD FLASH ON CONTACT AREA  
 1. 5u" Au; 2. 15u" Au  
 3. 30u" Au; 4. 50u" Au  
 2). SHELL: SPCC OR BRASS  
 PLATING OVER: 1. NICKEL ; 2. Au ; 3. Sn/Pb  
 3). HOUSING: THERMOPLASTIC UL94V-0 RATED,

ELECTRICAL


- 1). TERMINATION RESISTANCE: 30mΩ MAX  
 2). DIELECTRIC WITHSTANDING VOLTAGE: 750A VC AT SEA LEVEL

MECHANICAL

- 1). MATING FORCE: 40N MAX  
 2). UNMATING FORCE: 10N MIN

ENVIRONMENTAL

- 1). TEMPERATURE RANGE: -50 °C ~ +105 °C

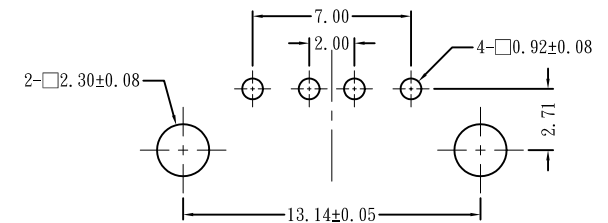

Recommended P.C. Board  
Hole Layout

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

煜倫有限公司

PART NO. USB-SR-4A

DWG NO. USB-SR-4A

FILE NO. USB-AF21X2X1101

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.25  
.XX ± 0.15  
.XXX ± 0.10  
AWG

DESCRIPTION:

USB A TYPE 板端 90°  
(CUSTOMER DRAWING)

AREA

REVISIONS

HK

DATE