

MINIATURE TOGGLE SWITCH

小型雙投開關

SPECIFICATIONS

CONTACT RATING—5 amps with resistive load @ 120VAC or 28VDC;
2 amps with resistive load @ 250VAC.

ELECTRICAL LIFE—50,000 make-and-break cycles at full load

CONTACT RESISTANCE—10 milliohms max. initial @ 2-4VDC.

100 milliamps for both coin silver and gold plated contacts.


INSULATION RESISTANCE—100 megohms min.

DIELECTRIC STRENGTH—1,000 volts RMS @ sea level.

OPERATING TEMPERATURE— -20°C to 65°C

Series T80  5A 125VAC or 28VDC, 2A 250VAC

Order guide: 型號說明

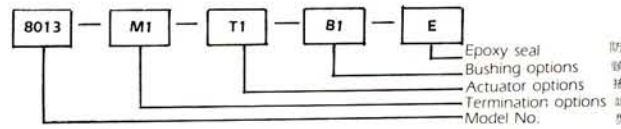

① If customer do not indicate the complete option, we'll supply standard (STD) type.

② Available options for T80 series are shown on page 10.


①如果客戶未指明，將以提供"標準品"為準

②請參閱第10頁圖樣說明

SPDT




Model No.	Switching Position		
8013	ON	NONE	ON
8013A	ON	NONE	(ON)
8014	ON	OFF	ON
8014A	(ON)	OFF	(ON)
8014B	ON	OFF	(ON)
Term CONN	2-3	OPEN	2-1



DPDT




Model No.	Switching Position		
8011	ON	NONE	ON
8011A	ON	NONE	(ON)
8012	ON	OFF	ON
8012A	(ON)	OFF	(ON)
8012B	ON	OFF	(ON)
Term CONN	2-3, 5-6	OPEN	2-1, 5-4

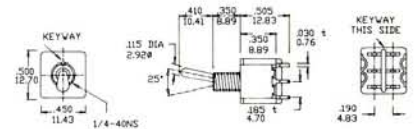

3PDT



Model No.	Switching Position		
T8301	ON	NONE	ON
T8303	ON	NONE	(ON)
T8305	ON	OFF	ON
T8307	(ON)	OFF	(ON)
T8309	ON	OFF	(ON)
Term CONN	2-3, 5-6 8-9	OPEN	2-1, 5-4 8-7

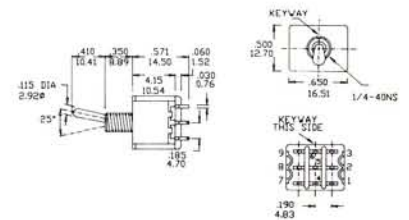

4PDT



Model No.	Switching Position		
T8401	ON	NONE	ON
T8403	ON	NONE	(ON)
T8405	ON	OFF	ON
T8407	(ON)	OFF	(ON)
T8409	ON	OFF	(ON)
Term CONN	2-3, 5-6 8-9, 11-12	OPEN	2-1, 5-4 8-7, 11-10

